


BTICINO &gt; Wiring devices &gt; Livinglight &gt; Dimmer &gt; Universal dimmers



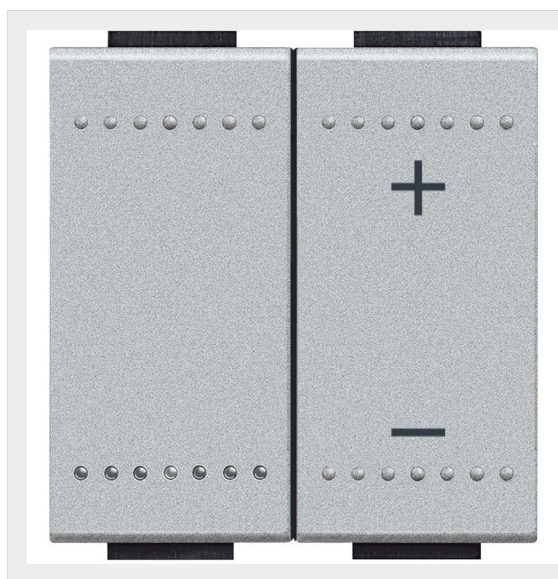

## NT4411N

Universal pushbutton dimmer (resistive, inductive, capacitive, fluorescent compact and dimmer LEDs) - supply range 100-240 Va.c. - no neutral – 2 modules - Tech - 240 V.Ac.: Incandescents and hologens 3 - 400 W; Halogens with ferromagnetic transformer 3 - 400 VA; Halogens with electronic transformer 3 - 400 VA; Dimmerable compact fluorescents 3 - 150 VA; Dimmerable LED lamps 3 - 150 VA. - 100 V.Ac.: Incandescents and hologens 3 - 200 W; Halogens with ferromagnetic transformer - 200 VA; Halogens with electronic transformer 3 - 200 VA; Dimmerable compact fluorescents 3 - 75 VA; Dimmerable LED lamps 3 - 75 VA.

### Technical features

Rated power VA	3 - 400 VA
Rated power W	3 - 400 W
Series	Livinglight

### Documentation

-  [Instructions sheet](#)
-  [LivingLight catalogue](#)