



Neve Up: 2P 10AX switch carbon matt

09060.CM

Neve Up / Devices / Devices - other functions

2P 10AX switch carbon matt

2P 10 AX 250 V~ switch (6 terminals), with two buttons, with direction arrows and central OFF position, carbon matt. Max 100 W for self-ballasted lamps (IEC 60669-1:2017)

Product Status

3 - Active

Minimum order quantity

10 NR




You may also be interested in




[09062.CM - Two interlocked 1P NO+NO 10A pushes carb](#)


Drawings

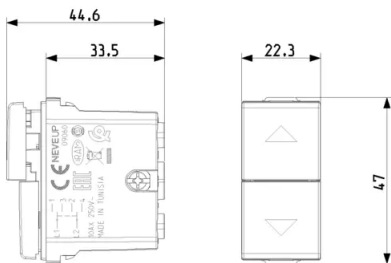

Space view



Backside view



3D View



Technical data

- **Class group:** Domestic switching devices
- **Class:** Push-switch button
- **Assembly arrangement:** Modular device for domestic switching devices
- **Model:** Other
- **Method of operation:** Other
- **Number of rockers:** 1
- **Number of modules (module system):** 1
- **Number of poles:** 2
- **Nominal voltage:** 250 v
- **Rated current:** 10,00 A
- **Feedback-signal contact:** No
- **Mounting method:** Flush mounted (plaster)
- **Type of fastening:** Engage (snap)
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Anti-bacterial treatment:** No
- **Surface protection:** Lacquered
- **Surface finishing:** Matt
- **Colour:** Anthracite
- **RAL-number (similar):** 7016
- **Transparent:** No
- **Label space/information surface:** Yes
- **Width of device:** 22,30 mm
- **Height of device:** 47,00 mm
- **Depth of device:** 44,60 mm

Certifications

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 19. NOM - Mexico
- 20. IRAM - Argentina
- 29. QCERT - Colombia ([download](#))
- 37. Marking - Morocco
- 99. WEEE Directive ([download](#))

Packaging



8 007352 665798
Code 8007352665798
Quantity 1 NR
Dim. 5.1x2.8x5.3 [cm]
Weight 41.4 [g]



8 007352 665804
Code 8007352665804
Quantity 10 NR
Dim. 14.4x11.6x6 [cm]
Weight 456.4 [g]



8 007352 665811
Code 8007352665811
Quantity 120 NR
Dim. 37.5x30x13.5 [cm]
Weight 5,818 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).