Arké white: Axial 1P 10AX 1-way switch white

19100.B

Arké white / Devices / Basic devices

Axial 1P 10AX 1-way switch white

Axial 1P 10 AX 250 V~ 1-way switch, lightable, replaceable button, white. Max 100 W for lamps with built-in power unit(IEC 60669-1:2017)

Product Status

3 - Active

Minimum order quantity

20 NR

Drawings

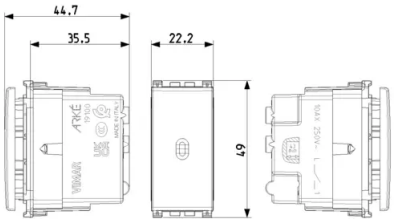

Space view



Backside view



3D View

Technical data

- **Class group**: Domestic switching devices
- **Class**: Installation switch
- **Wiring system**: Off switch 1-pole
- **Method of operation**: Rocker/button
- **Assembly arrangement**: Modular device for domestic switching devices
- **Number of modules (module system)**: 1
- **Push button switch**: Yes
- **Number of rockers**: 1
- **Mounting method**: Flush mounted (plaster)
- **Type of fastening**: Engage (snap)
- **With mounting plate**: No
- **Material**: Plastic
- **Material quality**: Thermoplastic
- **Surface protection**: Untreated
- **Surface finishing**: Matt
- **Colour**: White
- **RAL-number (similar)**: 9016
- **Label space/information surface**: Yes
- **Illumination**: Optional
- **Function lighting**: Control and orientation
- **Suitable for degree of protection (IP)**: IP40
- **Nominal voltage**: 250 v
- **Rated current**: 1.000 A
- **Feedback-signal contact**: No
- **Connection type**: Screwed terminal
- **Washing machine switch**: No

Certifications

- 00. CE Marking - EU
- 01. IMQ - Italy
- 10. EAC Eurasian Customs Union
- 15. CCC - China (download)
- 28. NSW / RCM - Australia (download)
- 29. QCERT - Colombia (download)
- 36. ISI - India
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 96. Electrotechnical expert (download)
- 99. WEEE Directive (download)

Packaging

Code	8007352684973
Quantity	1 NR
Dim.	5.1x2.8x5.3 [cm]
Weight	28.6 [g]

Code	8007352684980
Quantity	20 NR
Dim.	27x11.6x6 [cm]
Weight	637.4 [g]

Code	8007352684997
Quantity	120 NR
Dim.	37.5x30x13.5 [cm]
Weight	4,184.4 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.