

Shelly 1PM Mini Gen3



Device identification

- Device name: **Shelly 1PM Mini Gen3**
- Device model: **S3SW-001P8EU**
- Device SSID: **Shelly1PMMiniG3-XXXXXX**
- BLE model ID: **0x1016**

Short description

Shelly 1PM Mini Gen3 is a small form factor smart switch with power measurement, which allows remote control of electric appliances through a mobile phone, tablet, PC, or home automation system. It can work standalone in a local Wi-Fi network or it can also be operated through cloud home automation services. The device is an improved version of Shelly Plus 1PM Mini with a more advanced processor and increased memory.

Shelly 1PM Mini Gen3 can be accessed, controlled and monitored remotely from any place where the User has internet connectivity, as long as the device is connected to a Wi-Fi router and the Internet.

It can be retrofitted into standard electrical wall boxes, behind power sockets and light switches or other places with limited space.

Shelly 1PM Mini Gen3 has embedded Web Interface which can be used to monitor and control the device, as well as adjust its settings.

Main features

- **Smart Switch with Power Measurement:** Acts as a smart switch with the added capability of measuring power consumption, allowing you to monitor the energy usage of connected appliances.
- **Compact Design:** Designed as a small form factor switch, making it suitable for retrofitting into standard electrical wall boxes, behind power sockets, light switches, or other confined spaces.
- **Remote Control:** Enables remote control of electric appliances via a mobile phone, tablet, PC, or home automation system.
- **Local and Cloud Control:** Can function independently in a local Wi-Fi network and can also be operated through cloud home automation services.
- **Improved Processor and Memory:** Upgraded with an improved processor and increased memory for enhanced performance.
- **Remote Access:** Allows remote access, control, and monitoring from any location with internet connectivity, provided the device is connected to a Wi-Fi router and the internet.
- **Embedded Web Interface:** Features an embedded web interface for monitoring, control, and adjustment of settings.
- **BLE Gateway:** Bridge between your Shelly BLU devices and the wider Shelly ecosystem. It receives Bluetooth signals and sends them to the cloud or locally to another non-Bluetooth device.
- **Wi-Fi Range extender for IoT devices:** A Wi-Fi extender is employed to expand the reach of your Wi-Fi network by receiving your current Wi-Fi signal, enhancing its strength, and then transmitting the enhanced signal over a wider area.
- **Scripting:** <https://shelly-api-docs.shelly.cloud/gen2/Scripts/ShellyScriptLanguageFeatures/>
- **Wide range of integrations:** The device can be integrated with 3rd party home systems, documented HTTP API, MQTT(s), Web Hooks over HTTP and HTTPS, UDP
- **KNX:** Supports [KNXnet/IP](#) communication
- **Schedules:** Allows scheduling of complex operations to be executed in predefined time window. Users can specify time windows based on date, time of day, weekdays, hours, minutes and seconds.

Use cases

- **Appliance Control:** Use it to remotely control and automate the operation of various electric appliances such as lights, fans, or other devices.
- **Power Monitoring:** Monitor the power consumption of connected appliances in real-time. This is useful for understanding energy usage patterns and promoting energy efficiency.
- **Home Automation:** Integrate the Shelly 1PM Mini Gen3 into your home automation system to create custom scenes and schedules for your devices.
- **Energy Efficiency:** Leverage the power measurement feature to identify energy-hungry appliances and make informed decisions to improve overall energy efficiency in your home.

- **Remote Monitoring:** Keep an eye on your devices even when you're away from home. The remote access feature allows you to monitor and control connected appliances from anywhere with internet connectivity.
- **Space-Constrained Installations:** The compact design makes it suitable for retrofitting into standard electrical wall boxes, making it a good choice for installations with limited space.

Integrations

Amazon Alexa supported capabilities

Yes


Google Smart Home supported traits

Yes

Samsung SmartThings supported capabilities

Yes

Simplified internal schematics



Device electrical interfaces

Inputs

- 1 switch/button input on screw terminal
- 2 power supply inputs on screw terminals: N and L

Outputs

- 1 relay output with power measurement on screw terminal

Connectivity

- Wi-Fi
- Bluetooth

Safety functions

- Overheating protection
- Overvoltage protection
- Overcurrent protection
- Overpower protection

Supported load types

- Resistive (incandescent bulbs, heating devices)
- Capacitive (capacitor banks, electronic equipment, motor start capacitors)
- Inductive (LED light drivers, transformers, fans, refrigerators, air-conditioners)

User interface

Inputs

- One (Control) button
 - Press and hold for 5 seconds to enable Device access point and Bluetooth connection.
 - Press and hold for 10 seconds to factory reset the Device.


Specifications

Quantity	Value
Physical	
Size (HxWxD):	29x34x16 ±0.5 mm / 1.34x1.11x0.63 ±0.02 in
Weight:	18 ±1 g / 0.63 ±0.04 oz
Screw terminals max torque:	0.4 Nm / 3.5 lbin
Conductor cross section:	0.5 to 4 mm ² / 20 to 11 AWG (solid, stranded, and bootlace ferrules)
Conductor stripped length:	6 to 7 mm / 0.24 to 0.28 in
Mounting:	Wall box
Shell material:	Plastic
Shell color:	Red, C-3%; M-100%; Y-70%; K-12%
Terminal Color:	Black
Environmental	
Ambient working temperature:	-20 °C to 40 °C / -5 °F to 105 °F
Humidity:	30 % to 70 % RH
Max. altitude:	2000 m / 6562 ft
Electrical	
Power supply:	110 - 240 VAC
Relay:	NO contact, 1-pole, μ contact
Power consumption:	< 1.2 W
External protection:	Tripping characteristic B or C, 10A max. rated current, min. 6 kA interrupting rating, energy limiting class 3
Output circuits ratings	
Max. switching voltage:	240 VAC
Max. switching current:	8A/240 VAC
Max. switching power:	2000 W
Power measurement:	Yes

Voltage protection / Cutoff:	Yes
Current protection / Cutoff:	Yes
Max power protection / Cutoff:	Yes
Sensors, meters	
Internal-temperature sensor:	Yes
Radio	
Wi-Fi	
Protocol:	802.11 b/g/n
RF band:	2401 - 2495 MHz
Max. RF power:	< 20 dBm
Range:	Up to 30 m / 100 ft indoors and 50 m / 160 ft outdoors (Depends on local conditions)
Bluetooth	
Protocol:	4.2
RF band:	2400 - 2483.5 MHz
Max. RF power:	< 4 dBm
Range:	Up to 10 m / 33 ft indoors and 30 m / 100 ft outdoors (Depends on local conditions)
Microcontroller unit	
CPU:	ESP-Shelly-C38F
Flash:	8 MB
Firmware capabilities	
Schedules:	20
Webhooks (URL actions):	20 with 5 URLs per hook
Scripting:	Yes
MQTT:	Yes
UDP:	Yes

Advanced schedules:	Yes
KVS (Key-Value Store):	Yes

Basic wiring diagrams

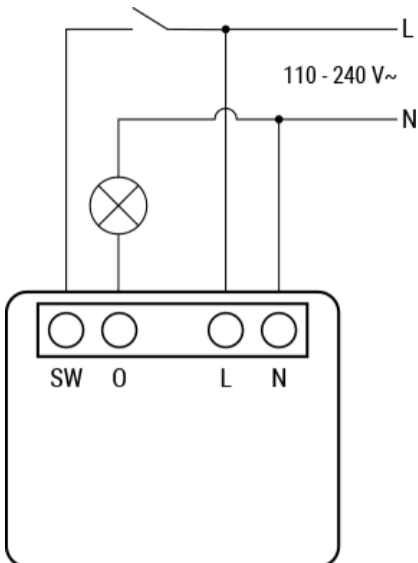

Legend

Terminals		Wires	
SW	Switch (controlling O) input terminal	L	Live (110 - 240 VAC) wire
O	Load circuit output terminal	N	Neutral wire
L	Live (110-240 V) terminal		
N	Neutral terminal		

Shelly Smart Control

- [Adding the device to the Shelly Smart Control](#)

Shelly Web user interface

- [Shelly 1PM Mini Gen3 Web user interface guide](#)

Components and APIs

- [This device](#)
- [All Shelly devices and services](#)

Compliance

- [Shelly 1PM Mini Gen3 multilingual EU declaration of conformity 270 2026-03-13.pdf](#)
- [Shelly 1PM Mini Gen3 UK PSTI ACT statement of compliance 270 2026-03-13.pdf](#)
- [Shelly 1PM Mini Gen3 UKCA declaration of conformity 270 2026-03-13.pdf](#)
- [Shelly 1PM Mini Gen3 AU NZ Certificate for Suitability.pdf](#)

Compliance archive

[Shelly Mini 1PM Gen3 x2 UK PSTI ACT Statement of compliance 20 2024-04-26.pdf](#)

[Shelly Mini 1PM Gen3 UK PSTI ACT Statement of compliance 5 2024-04-26.pdf](#)

[Shelly 1PM Mini Gen3 multilingual EU declaration of conformity 239 2025-12-05.pdf](#)

[Shelly 1PM Mini Gen3 multilingual EU declaration of conformity 137 2025-07-22.pdf](#)

[Shelly 1PM Mini Gen3 multilingual EU declaration of conformity 24 2023-12-13.pdf](#)

Printed user guide