



## Enclosures and mounting boxes: Flush-mountbox 12-14M f/hollowwalls blue

### V71720

Enclosures and mounting boxes / Flush mounting boxes / For hollow walls

#### Flush-mountbox 12-14M f/hollowwalls blue

Multifunction mounting boxe (GW 850 °C) for hollow walls, light blue

- Suitable for several types of hollow walls (e.g. plasterboard, wood, plastic laminate or similar)
- Preparation of the hole with a hollow cutter with a diameter of 68 mm. Hole centring plate incorporated into the back
- Improved retention knockouts, designed for the insertion of pipes with various cross-sections (16, 20 or 25 mm) and metal fins for surface mounting the box on walls with a variable thickness of between 1 and 38 mm
- Wide range of accessories available: accessories with a template function for tracing the hole, with joining function for mounting in series and installation on the inside of the wall; internal partitions; decorative covers



#### Product Status

3 - Active

#### Minimum order quantity



20 NR

#### Video


- [Tutorial ISOBOX EN](#)




## Drawings

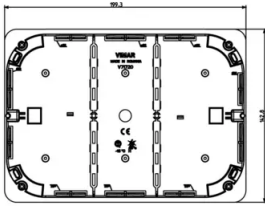

Space view

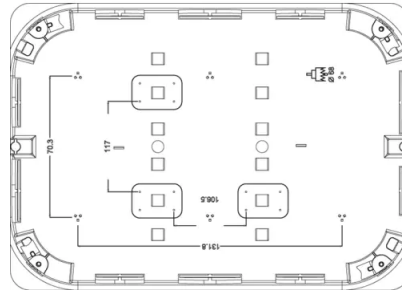

Backside view

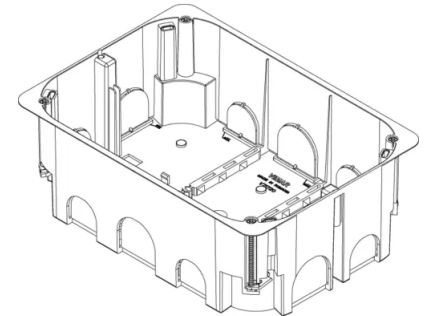

3D View

## Technical data

- **Class group:** Connection devices
- **Class:** Box/housing for built-in mounting in the wall/ceiling
- **Mounting method:** Hollow wall
- **Shape:** Rectangular
- **Construction type:** Device connection box (round/square)
- **Model:** Other
- **Provided with revolving ring:** No
- **Connectable:** Yes
- **Equipped with:** None
- **Diameter:** 0 mm
- **Length:** 142,80 mm
- **Width:** 199,30 mm
- **Depth:** 0,00 - 70,00 mm
- **Internal depth:** 50,00 mm
- **For number of electric fittings:** 14
- **Mounting switching equipment:** Screwing
- **With screws:** No
- **Housing feed-through by break-out opening:** Yes
- **Housing feed-through by seal membrane:** No
- **Housing feed-through by nozzle:** No
- **Housing feed-through by step membrane:** No
- **For tube diameter:** 20/25 mm
- **Pipe locking:** No
- **Pipe locking optional:** No
- **Inlet from the rear:** Yes
- **Number of inlets:** 10
- **Number of included spouts:** 0
- **Material:** Plastic
- **Halogen free:** Yes
- **Surface protection:** Untreated
- **Colour:** Blue
- **Degree of protection (IP):** IP00
- **Cover model:** None
- **Transparent cover:** No
- **Cover attachment:** Screwed
- **Sealable:** No
- **Circuit integrity:** None
- **With screening:** No
- **Air tight:** No
- **Max. conductor cross section:** 0
- **Number of poles of the clamp:** 0
- **Clamp position fixed:** No
- **Luminaire hook mounting:** No
- **Nozzle:** None
- **With nail lugs:** No
- **Special application:** None

## Certifications

- 01. IMQ - Italy ([download](#))
- 15. CCC - China ([download](#))
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))



## Packaging



8 0 0 7 3 5 2 4 2 5 8 0 4  
**Code** 8007352425804  
**Quantity** 1 NR  
**Dim.** 20x14.2x7 [cm]  
**Weight** 123 [g]



8 0 0 7 3 5 2 4 2 5 8 1 1  
**Code** 8007352425811  
**Quantity** 20 NR  
**Dim.** 59x38.5x24 [cm]  
**Weight** 3,152 [g]

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).