

ECTC1240



PLIABLE PVC CONDUIT 22212 Ø 40 mm - 25 m

Conduits and fittings > Conduits > Corrugated conduits > Series tc12 - pvc - class 22212 - 320 n > plastic conduits > Light grey

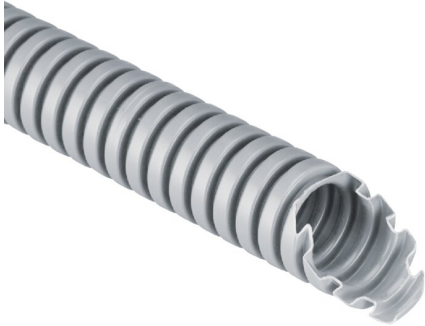


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals

| | | | | | |
|------------|-------------|----|---------|-----|---------------|
| UL94 V0 | GWT 960° | CE | RoHS II | OVE | MADE IN ITALY |
|------------|-------------|----|---------|-----|---------------|

Norms

EN 61386-1 EN 61386-22

Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

| | | | | | |
|---|---------------------------|--|---------------------------|--|---------|
| Flush-mounted installation | Yes | Material | Polyvinyl chloride (PVC) | Halogen free | No |
| Colour | Grey | RAL-number | 7035 | UV resistant | No |
| Suitable for underground installation | No | Operating temperature | -5-60 °C | Bending strength | Pliable |
| Compressive strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | Impact strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | With sleeve | No |
| Fire retardant version | Yes | Surface mounting | No | Suitable for installation on wood | No |
| Suitable for hollow wall installation | No | Suitable for concrete installation | Yes | Machine and systems installation | No |
| Suitable for underfloor installation (screed) | No | Suitable for outdoor installation | No | Inner diameter | 31.5 mm |
| Outer diameter | 40 mm | High conducting inner coating | No | With metre indication | No |

Documentation available for download

Certification
OVE_50017-001-09.pdf

Certification
OVE_50017-001-10.pdf

Barcode



8054320285830

Cardboard

25 MT

0.6x0.6x0.22 [m]

3.275 [kg]



BAHAGTC1240

Pallet

1000 MT

0.8x1.2x2.5 [m]

131 [kg]