


ECTC1216T



**PLIABLE PVC CONDUIT 22212 Ø16 mm
- 100 m WITH DRAW TAPE**

Conduits and fittings > Conduits > Corrugated conduits >
Series tc12 - pvc - class 22212 - 320 n > plastic conduits >
Light grey - cable puller

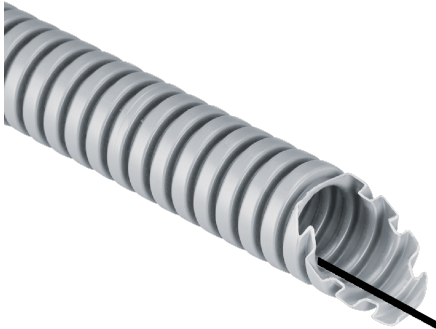

Technical Symbols/Marks/Approvals



Norms

EN 61386-1 EN 61386-22

Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

| | | | | | |
|---|---------------------------|--|---------------------------|--|---------|
| Flush-mounted installation | Yes | Material | Polyvinyl chloride (PVC) | Halogen free | No |
| Colour | Grey | RAL-number | 7035 | UV resistant | No |
| Suitable for underground installation | No | Operating temperature | -5-60 °C | Bending strength | Pliable |
| Compressive strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | Impact strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | With sleeve | No |
| Fire retardant version | Yes | Surface mounting | No | Suitable for installation on wood | No |
| Suitable for hollow wall installation | No | Suitable for concrete installation | Yes | Machine and systems installation | No |
| Suitable for underfloor installation (screed) | No | Suitable for outdoor installation | No | Inner diameter | 10.5 mm |
| Outer diameter | 16 mm | High conducting inner coating | No | With metre indication | No |

Documentation available for download

Certification
OVE_50017-001-09.pdf

Certification
OVE_50017-001-10.pdf

Barcode



8054320285939

Cardboard

100 MT

0.53x0.53x0.14 [m]

3.65 [kg]



8057711597680

Pallet

6000 MT

0.8x1.2x2.5 [m]

219 [kg]