

ECCP5050B

CABLE TRUNKING DIN WITH COVER DIM. 50X50 WHITE



Trunkings > Wall and ceiling > Solid cable trunkings > Series cp
- trunking lengths > Cable trunkings > Din pitch trunkings



IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals



Norms

EN 50085-1 EN 50085-2-1

Description

Cable duct made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. A front-hinged lid is included.


Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC001938 - Wall duct

Degree of protection (IP)	IP40	Material	Plastic	Material quality	Polyvinyl chloride (PVC)
Halogen free	No	Anti-bacterial treatment	No	Surface protection	Untreated
Colour	White	Impact strength	IK07	Width	50 mm
Depth	50 mm	Length	2 m	Usable cross section	2076 mm ²
RAL-number	9001	Mounting method cover	Spanned	With protective foil	No
Working temperature	-5-60 °C	Number of plug-in partitions	0	With cable fixing clip	No
With duct connector	No	Bottom perforation	No	Number of covers	1
Cover width 1	50 mm	Symmetric	Yes	Covers included	Yes
Construction type rectangular	Yes	Construction rear wall (inner side)	Perforated		

Documentation available for download

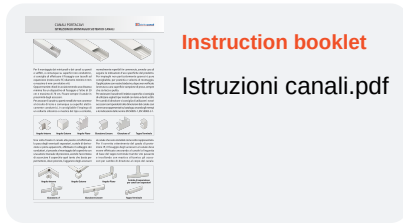

Barcode



8050880887460

Cardboard

24 MT

0.195x0.102x2.025 [m]

13.0008 [kg]