

## Информационен лист | Номер на артикул: 2273-202


COMPACT splicing connector; for solid conductors; max. 2.5 mm<sup>2</sup>; 2-conductor; transparent housing; white cover; Surrounding air temperature: max 60°C (T60); 2,50 mm<sup>2</sup>; transparent

[www.wago.com/2273-202](http://www.wago.com/2273-202)



RoHS  
Compliant

BOMcheck.net



### Описание на артикула

Advantages:

- Convenient wiring via an extremely compact design
- Push-in termination of up to eight solid conductors
- Cross-section range: 0.5 ... 2.5 mm<sup>2</sup>
- Any combination of conductor sizes is possible
- PUSH WIRE® connection terminates solid ("s") copper conductors

### Note:

#### Terminating Aluminum Conductors

WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm<sup>2</sup>/12 AWG if WAGO "Alu-Plus" Contact Paste is used for termination.

"Alu-Plus" Contact Paste Advantages:

- Automatically destroys the oxide film during clamping.
- Prevents fresh oxidation at the clamping point.
- Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).
- Provides long-term protection against corrosion.

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД  
Бизнес център Сердика  
Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София  
Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10  
Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?  
Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.



For spring clamp connections with PUSH WIRE® connection technology, **WAGO recommends that the aluminum conductor first be cleaned** and then immediately inserted into the clamping unit filled with "Alu-Plus" contact paste.

It is also possible to apply WAGO "Alu-Plus" **additionally** on the whole surface of the aluminum conductor before termination.

Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors::

2.5 mm<sup>2</sup> = 16 A

4 mm<sup>2</sup> = 22 A

**Safety information 1:**

in grounded power lines

**Данни****Electrical data****Ratings per IEC/EN 60664-1**

| Ratings per                | IEC/EN 60664-1                                          |
|----------------------------|---------------------------------------------------------|
| Nominal voltage (II/2)     | 450 V                                                   |
| Rated surge voltage (II/2) | 4 kV                                                    |
| Rated current              | 24 A                                                    |
| Legend (ratings)           | (II / 2) ≙ Overvoltage category II / Pollution degree 2 |

**Connection data**

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| Connection technology             | PUSH WIRE®                                  |
| Actuation type                    | Push-in                                     |
| Connectable conductor materials   | Copper<br>Aluminum                          |
| Solid conductor                   | 0,5 ... 2,5 mm <sup>2</sup> / 20 ... 16 AWG |
| Strip length                      | 11 mm / 0.43 inch                           |
| Total number of connection points | 2                                           |
| Total number of potentials        | 1                                           |
| Wiring type                       | Side-entry wiring                           |

**Physical data**

|        |                      |
|--------|----------------------|
| Width  | 10 mm / 0.394 inch   |
| Height | 5,8 mm / 0.228 inch  |
| Depth  | 16,7 mm / 0.657 inch |

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД  
Бизнес център Сердика  
Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София  
Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10  
Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?  
Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.

## Material Data

|                             |             |
|-----------------------------|-------------|
| Color                       | transparent |
| Cover color                 | white       |
| Flammability class per UL94 | V2          |
| Fire load                   | 0,014 MJ    |
| Weight                      | 0,7 g       |

## Environmental Requirements

|                                         |                |
|-----------------------------------------|----------------|
| Surrounding air temperature (operation) | 60 ... 60 °C   |
| Continuous operating temperature        | 105 ... 105 °C |
| Temperature marking per EN 60998        | T60            |

## Commercial data

|                       |                     |
|-----------------------|---------------------|
| Product Group         | 7 (Push Wire Conn.) |
| Packaging type        | BOX                 |
| Country of origin     | DE                  |
| GTIN                  | 4050821027843       |
| Customs tariff number | 85369010000         |

## Одобрения / Сертификати

### Country specific Approvals

| Лого                                                                               | Одобрение                                           | Допълнителен текст за одобрение | Име на сертификат |
|------------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------|-------------------|
|  | <b>VDE</b><br>VDE Prüf- und Zertifizierungsinstitut | EN 60998                        | 40029794          |

### Ship Approvals

| Лого                                                                               | Одобрение                                               | Допълнителен текст за одобрение | Име на сертификат        |
|------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------|--------------------------|
|  | <b>ABS</b><br>American Bureau of Shipping               | -                               | 15-<br>HG1419918-<br>PDA |
|  | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | EN 60998                        | TAE000015T               |

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД  
Бизнес център Сердика  
Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София  
Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10  
Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?  
Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.



LR  
Lloyds Register

EN 60998

04/20013  
(E8)

## Съставни части

## Съвместими продукти

### General accessories



Артикул №: 249-130  
Syringe; Contents: 20 ml Alu-Plus contact paste

[www.wago.com/249-130](http://www.wago.com/249-130)

### Mounting adapter



Артикул №: 2273-500  
Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35 rail mounting/screw mounting; orange

[www.wago.com/2273-500](http://www.wago.com/2273-500)

## Изтегляния

### Documentation

#### Bid Text

|             |              |         |           |
|-------------|--------------|---------|-----------|
| 2273-202    | May 17, 2017 | doc     | Изтегляне |
| doc - Datei |              | 25,1 kB |           |

|             |              |        |           |
|-------------|--------------|--------|-----------|
| 2273-202    | Feb 19, 2019 | xml    | Изтегляне |
| X81 - Datei |              | 3,2 kB |           |

#### Additional Information

|                        |             |        |           |
|------------------------|-------------|--------|-----------|
| Technical explanations | Apr 3, 2019 | pdf    | Изтегляне |
|                        |             | 2,2 MB |           |

## CAD/CAE-Data

### CAD data

|                       |     |           |
|-----------------------|-----|-----------|
| 2D/3D Models 2273-202 | URL | Изтегляне |
|-----------------------|-----|-----------|

### CAE data

|                            |     |           |
|----------------------------|-----|-----------|
| EPLAN Data Portal 2273-202 | URL | Изтегляне |
|----------------------------|-----|-----------|

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД  
Бизнес център Сердика  
Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София  
Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10  
Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?  
Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.

WSCAD Universe 2273-202

URL

Изтегляне

ZUKEN Portal 2273-202

URL


Изтегляне

## Бележки за инсталиране


### Conductor termination



Strip solid conductor to 11 mm / 0.43 inch (see marking).

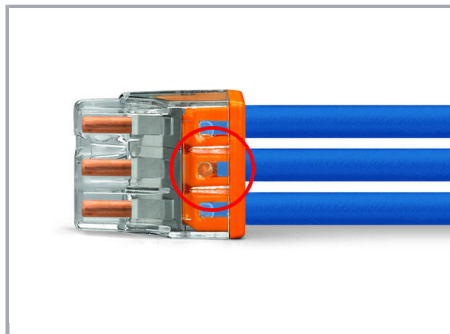


The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct.

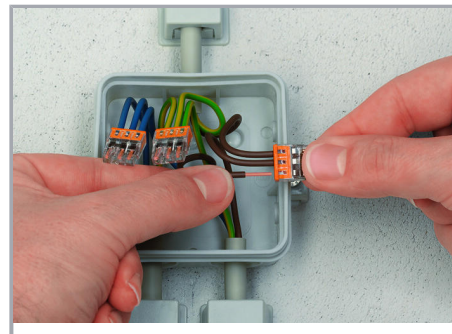

Termination: Insert stripped solid conductor until it hits backstop.

Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.

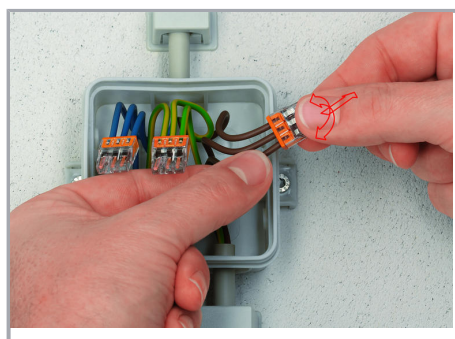

Removal: Hold conductor to be removed and twist alternately left and right while pulling the connector.

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД

Бизнес център Сердика

Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София

Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10

Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?

Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.

## Testing



Testing via test port opposite to conductor entry.

Подлежи на промяна. Моля, обърнете внимание и на допълнителната документация на продукта!

ВАГО България ООД  
Бизнес център Сердика  
Бул."Акад. Иван Гешов" 2Е | Сграда 1, ет. 4, офис 417 | 1330 София  
Тел.: +359 2 489 46 09 | Тел.: +359 2 489 46 10  
Имейл: [sales.bg@wago.com](mailto:sales.bg@wago.com)

Имате ли въпроси относно нашите продукти?  
Винаги ще се радваме да получим вашето обаждане на +359 2 489 46 09.