


Data sheet | Item number: 2273-203


COMPACT PUSH WIRE® connector for junction boxes; 3-conductor connector; transparent housing; orange cover

www.wago.com/2273-203

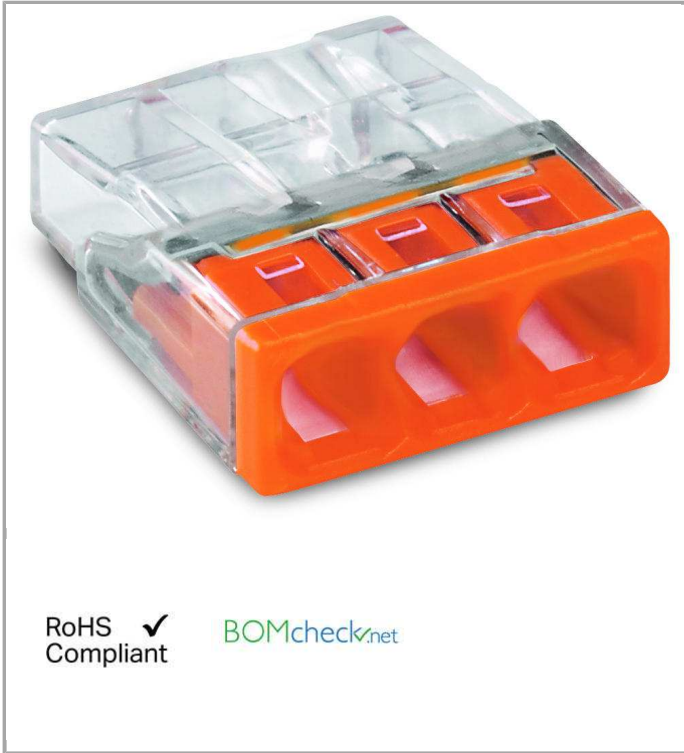

RoHS
Compliant

BOMcheck.net



Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (II / 2)	450 V
Rated impulse voltage (II / 2)	4 kV
Rated current	24 A



Legend (ratings)

(II / 2) Δ Overvoltage category II / Pollution degree 2**Connection data**

Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm ² / 20 ... 14 AWG
Strip length	11 mm / 0.43 Inch
Total number of connection points	3
Total number of potentials	1
Type of wiring	Side-entry wiring

Geometrical Data

Width	14 mm / 0.551 inch
Height	5.8 mm / 0.228 inch
Depth	16.7 mm / 0.657 inch

Material Data

Color	transparent
Cover color	orange
Flammability class per UL94	V2
Fire load	0.019 MJ
Weight	1.017 g

Environmental Requirements

Surrounding air (operating) temperature	60 °C
T-Marking per EN 60998	T60

Commercial data

Country of origin	DE
GTIN	4050821027850
Customs Tariff No.	85369010000
Product Group	7 (Push Wire Conn.)

Approvals / Certificates**Country specific Approvals**

Logo	Approval	Certificate name
	VDE VDE Prüf- und Zertifizierungsinstitut	40029794