


General info

Technical - Recessed lights


Indoor ceiling recessed projector with integrated LED sources and direct light emission

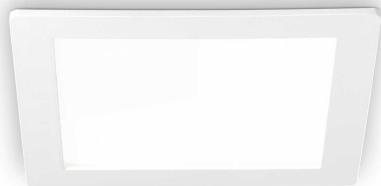

Ean	8021696124001
Item	GROOVE FI 20W SQUARE 3000K
Installation	Recessed (Ceiling)
Guarantee	5 years
Gross weight	0.62 kg
Volume	0.00234 m ³

Technical info

Net weight	0.54 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	150 x 150 - h. ≥ 60 , 7-15



Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	20 W
Emission	Direct
Max consumption	max 20 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	30000 h
CRI	> 80
Light beam	110°
Light beam flux	2450 lm
Useful light flux	1500 lm
Photobiological risk	1
Standby power	< 0.50 W