



General info


Technical - Systems

Indoor suspended linear fitting with multiple integrated LED sources and direct/indirect light emission

Ean	8021696192666
Item	FLUO BI-EMISSION 1200 3000K WH
Installation	Suspension
Guarantee	5 years
Gross weight	4.89 kg
Volume	0.018311 m ³

Technical info

Net weight	2.89 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Accessories not included	Mounting kit (suspension), Dimmable drivers kit, Structure connector

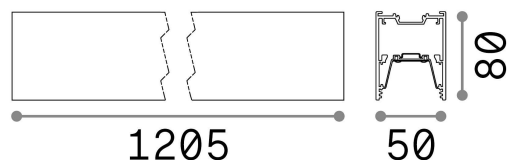

Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	27+13 W
Emission	Direct + Indirect
Max consupcion	max 40 W
Features LED	LED SMD SAMSUNG
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Light beam	105+105°
Light beam flux	5000 lm
Useful light flux	4250 lm
Standby power	< 0.50 W