



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks – and many other standard types
- Low glare due to matte black anti-glare ring
- Honeycomb filters available for further glare reduction



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Weight (kg/pc)
Dimmable (Triac)								
541001069600	LEDSpot3C-C-P 12W-Dim-3000-36D-BL	Halogen 100W	12	960	80	3000	36°	0.44

Accessories



550098001000
LEDSpot3C-C-P R65-Reflector-24D



599007083000
LEDSpot3C-C-P R65-Honeycomb

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001069600	LEDSpot3C-C-P 12W-Dim-3000-36D-BL	94051190	280x100x120	0.63	6941408832814	1
550098001000	LEDSpot3C-C-P R65-Reflector-24D	94059200	75x75x40	0.01	6941408832869	1
599007083000	LEDSpot3C-C-P R65-Honeycomb	94059200	62x62x10	0.16	6941408896700	1
821017001200	LEDSmart-BLE-Relay-250W-DIM	94059200	90x40x30	0.08	6941408898469	1
821017003600	LEDSmart-BLE2-Relay-250W-DIM	94059200	90x40x30	0.09	6931783007594	1

Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Triac
Maximum tilt angle	85°
Finishing	Matte Black
Colour rendering index (CRI)	≥ 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Aluminium
Optical material	Dome shape
Lens material	Polycarbonate

Ambient Conditions	
Operating temperature	-10~+40°C
Application temperature	+25°C
Storage environment	-25~+50°C



ENERGY

OPPLE Lighting
541001069600

A	
B	
C	
D	
E	
F	
G	


F

12
kWh/1000h

2019/2015

Dimensional Drawing (mm)

LEDSpot3C-C-P 12W-Dim

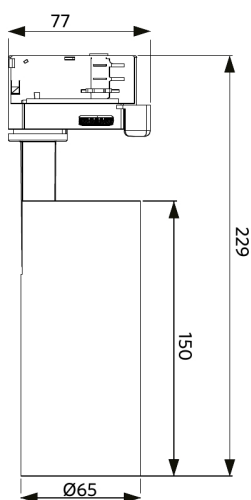

Photometric Data

