



## Ceiling Light Luna

- Stylish and compact ceiling luminaire
- Clean "twist-and-lock" mounting system
- High quality full metal body
- Low height of only 46mm
- Suitable for ceiling and wall mounting



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
540001295400	LEDceilingLu-E Rd142-24W-830-WH	CFL 2x26W	24	2040	85	3000	0.27

## Accessories



542098030700  
Junction-Box-WH

## Packaging Information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
540001295400	LEDceilingLu-E Rd142-24W-830-WH	94051190	145x52x149	0.35	6941408895840	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	No
Dimmability	On-Off	<b>Mechanical Properties</b>	
Beam angle	100°	Housing material	Aluminium
Finishing	White RAL9003	Optical material	Polycarbonate
Colour rendering index (CRI)	≥ 80	<b>Ambient Conditions</b>	
Degree of protection (IP)	IP20	Operating temperature	-10-+45°C
Impact strength	IK02	Application temperature	+25°C
Protection class	II	Storage environment	-25-+50°C
Risk group (EN 62471)	RG0		
With control gear	Yes		
Displacement factor (DF)	≥ 0.9		



## Dimensional Drawing (mm)

LEDCeilingLu-E Rd142

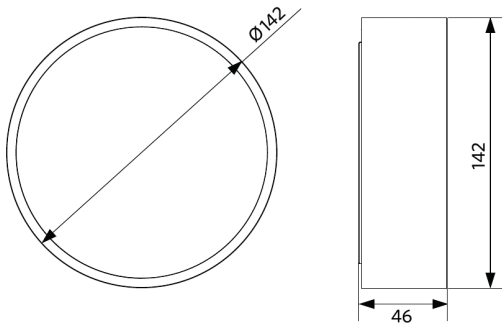

## Photometric Data

