



T5 Batten S with switch

- Linear LED batten with power switch
- Uniform, diffused light, creating a pleasant atmosphere
- Battens connect up to 15 meters
- Including power cable, mounting and connection pieces (fixed and flexible)
- Including integrated switch
- Free to position stainless steel mounting clips



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
140044075	LED E T5 batten 900 11W S 4000K BL	TL 1x18W	11	1200	109	4000	0.20

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140044075	LED E T5 batten 900 11W S 4000K BL	94051190	1225x29x37	0.55	6956712666338	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	40,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	No
Dimmability	On-Off	230V Cable length	1.5 m
Beam angle	140	230V Connection cable length	0.3 m
Finishing	White	Mechanical Properties	
Colour rendering index (CRI)	≥ 80	Material housing	Polycarbonate
Degree of protection (IP)	IP20	Ambient Conditions	
Protection class	II	Operating temperature	-20-+40°C
Risk group (EN 62471)	RG0	Application temperature	+25°C
With control gear	Yes	Storage environment	-25-+50°C
Power factor	≥ 0.9		



ENERGY

OPPLE Lighting
140044075

A
B
C
D
E
F
G


F

11 kWh/1000h


2019/2015

Dimensional Drawing (mm)

LED E T5 batten 900

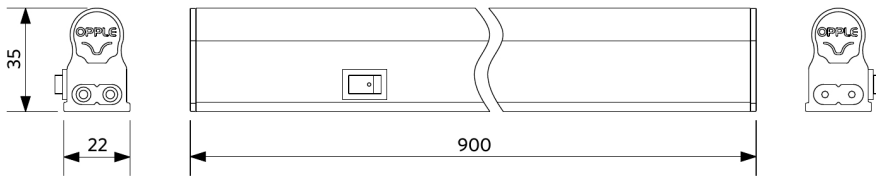

Photometric Data

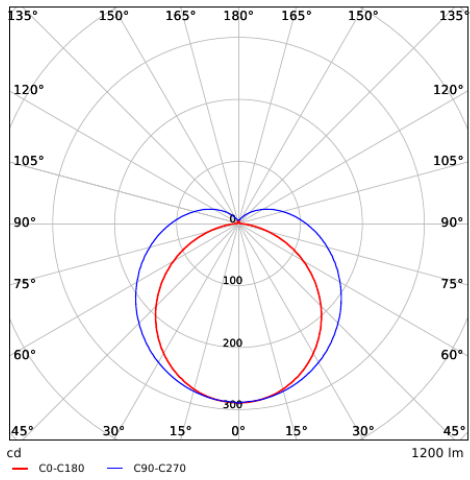

Accessories



Accessories included