



## Waterproof Basic G2

- Cost effective "sealed-for-life" waterproof luminaire
- Improved efficacy of 130 lm/W
- Standard equipped with wirethrough for faster installation
- Easy, tool-less installation for electrical connection
- Supplied with stainless steel ceiling and suspension clips



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
711000004500	LEDWaterproof-B2 L1200-36W-865	TL 2x36W	36	4680	130	6500	0.66


## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
711000004500	LEDWaterproof-B2 L1200-36W-865	94051190	70x70x1300	0.72	6931783004777	1


Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	See catalogue appendix
Colour consistency (SDCM)	5	Connection	Specifications
Dimmability	On-Off	<b>Mechanical Properties</b>	
Beam angle	110°	Material housing	Polycarbonate
Finishing	Grey RAL 7035	UV resistant	Yes
Colour rendering index (CRI)	≥ 80	Optical material	Polycarbonate
Degree of protection (IP)	IP65	Mounting clips	Stainless steel
Impact strength	IK08	<b>Ambient Conditions</b>	
Protection class	II	Operating temperature	-30-+45°C
Risk group (EN 62471)	RG0	Application temperature	+25°C
With control gear	Yes	Storage environment	-30-+50°C
Glow wire test	650°C		
Power factor	≥ 0.9		
Input wire diameter	1mm <sup>2</sup> - 2.5mm <sup>2</sup>		
Internal wiring (mm <sup>2</sup> )	3x1.5		
Max. input cable diameter (mm)	5-9 mm		



## Dimensional Drawing (mm)

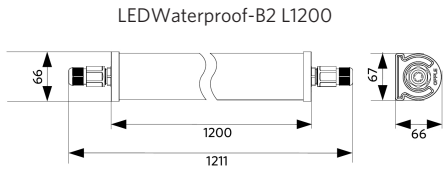

## Installation Possibilities

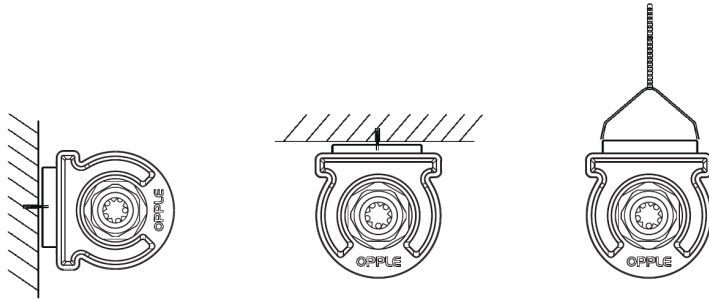

## Photometric Data

