



**Filament**

- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- No UV / IR radiance so there is less risk of damage



**Specifications**

| Item Code    | Item Description                   | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|--------------|------------------------------------|-------------------|-----------|-------|-----------------|---------|----------------|
| 500010000400 | LED-E-A60-FILA-E27-7W-DIM-4000K-FR | GLS 60W           | 7         | 806   | 115             | 4000    | 0.04           |

**Packaging Information**

| Item         |                                    |            | Box                     |                   |               |        |
|--------------|------------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code    | Item Description                   | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN           | pc/box |
| 500010000400 | LED-E-A60-FILA-E27-7W-DIM-4000K-FR | 85395200   | 128x68x68               | 0.08              | 6945730433176 | 1      |
| 821017001200 | LEDsmart-BLE-Relay-250W-DIM        | 94059200   | 90x40x30                | 0.08              | 6941408898469 | 1      |
| 821017003600 | LEDsmart-BLE2-Relay-250W-DIM       | 94059200   | 90x40x30                | 0.09              | 6931783007594 | 1      |

**Technical Specifications**

|                              |          |
|------------------------------|----------|
| Lifetime (L70)               | 15,000 h |
| On-/Off-cycles               | 100,000  |
| Dimmability                  | Triac    |
| Beam angle                   | 360°     |
| Finishing                    | Frosted  |
| Colour rendering index (CRI) | ≥ 80     |

**Electrical Supply**

|                  |           |
|------------------|-----------|
| Frequency        | 50/60 Hz  |
| Nominal voltage  | 220-240 V |
| DC input voltage | No        |

**Ambient Conditions**

|                         |           |
|-------------------------|-----------|
| Operating temperature   | -20-+40°C |
| Application temperature | +25°C     |
| Storage environment     | -25-+50°C |



**ENERGY**

OPPLE Lighting  
500010000400


|   |          |
|---|----------|
| A |          |
| B |          |
| C |          |
| D |          |
| E | <b>E</b> |
| F |          |
| G |          |

**7** kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LED-E-A60-FILA

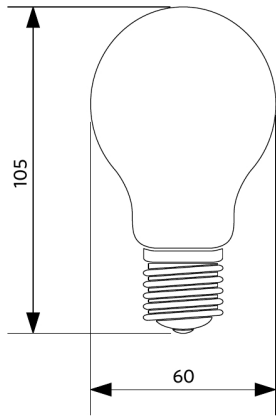

## Photometric Data

