



Connection terminal, 400A, 4p, flat/round

Part no. **K240/4**


Catalog No. **041628**

EL-Nummer (Norway) **4132419**

Delivery program

Product range			General switchboard accessories
Product function			Accessories panel building
Accessories			Terminations
Accessories			Terminals, 160 – 1000 A
Rated insulation voltage	U_i	V AC	1000
Description			Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN, Relationship of rated operational current →terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021 Outer terminal for round or sectoral conductor, other side for Cu strip
Rated operational current	I_e	A	400
Pole			4
Terminal capacity			
Cu/Al cable			<ul style="list-style-type: none"> Cu Round stranded Sectoral stranded Round solid Sectoral solid Al Round solid Sectoral solid
			1 x 50 - 240 2 x 25 - 120
Al cable			Al
			Sectoral solid
			1 x 95 - 185 2 x 50 - 95
Copper band		mm	6 x 16 x 0.8 - 10 x 16 x 0.8
			# copper strip
conductor			25 x 15
			Cu bar
Notes Conversion kits for strip terminal in cable connection available separately Terminal covers available separately			

Dimensions

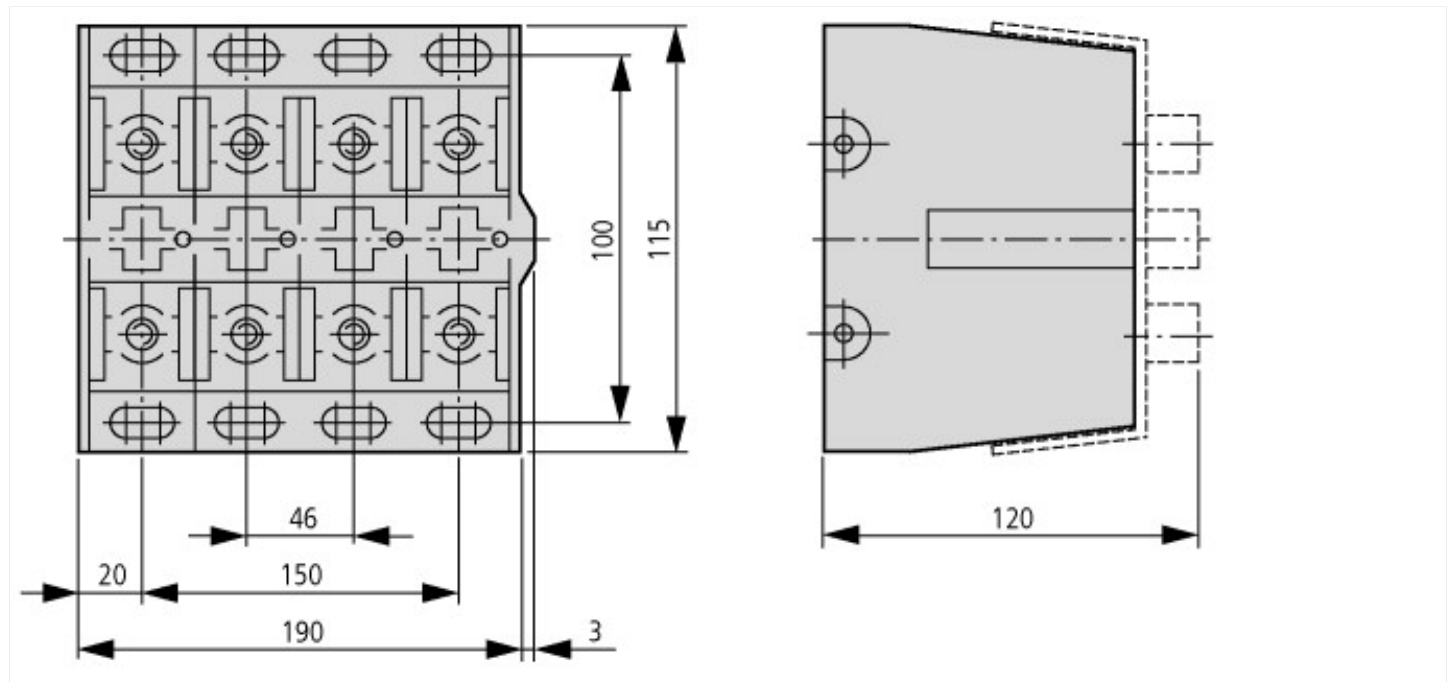

Additional product information (links)

AWA3400-0608 Connection terminal K240/...

AWA3400-0608 Connection terminal K240/... ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/06081089.pdf