



Connection terminal, 160A, 4p, flat/round


Part no. **K95/4**
 Catalog No. **027390**

EL-Nummer **4132413**
 (Norway)

Delivery program

Product range			General switchboard accessories
Product function			Accessories panel building
Accessories			Terminations
Accessories			Terminals, 160 – 1000 A
Rated insulation voltage	U _i	V AC	1000
Description			Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN, Relationship of rated operational current →terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021 Outer terminal for round or sectoral conductor, other side for Cu strip
Rated operational current	I _e	A	160
Pole			4
Terminal capacity			
Cu/Al cable			<ul style="list-style-type: none"> Cu Round stranded Sectoral stranded Round solid Sectoral solid Al Round solid Sectoral solid
Al cable			<ul style="list-style-type: none"> 1 x 16 - 95 Al Sectoral solid
Copper band		mm	<ul style="list-style-type: none"> 1 x 35 - 70 3 x 9 x 0.8 - 6 x 9 x 0.8
conductor			<ul style="list-style-type: none"> # copper strip 18 x 4 Cu bar
Notes Conversion kits for strip terminal in cable connection available separately Terminal covers available separately			

Dimensions

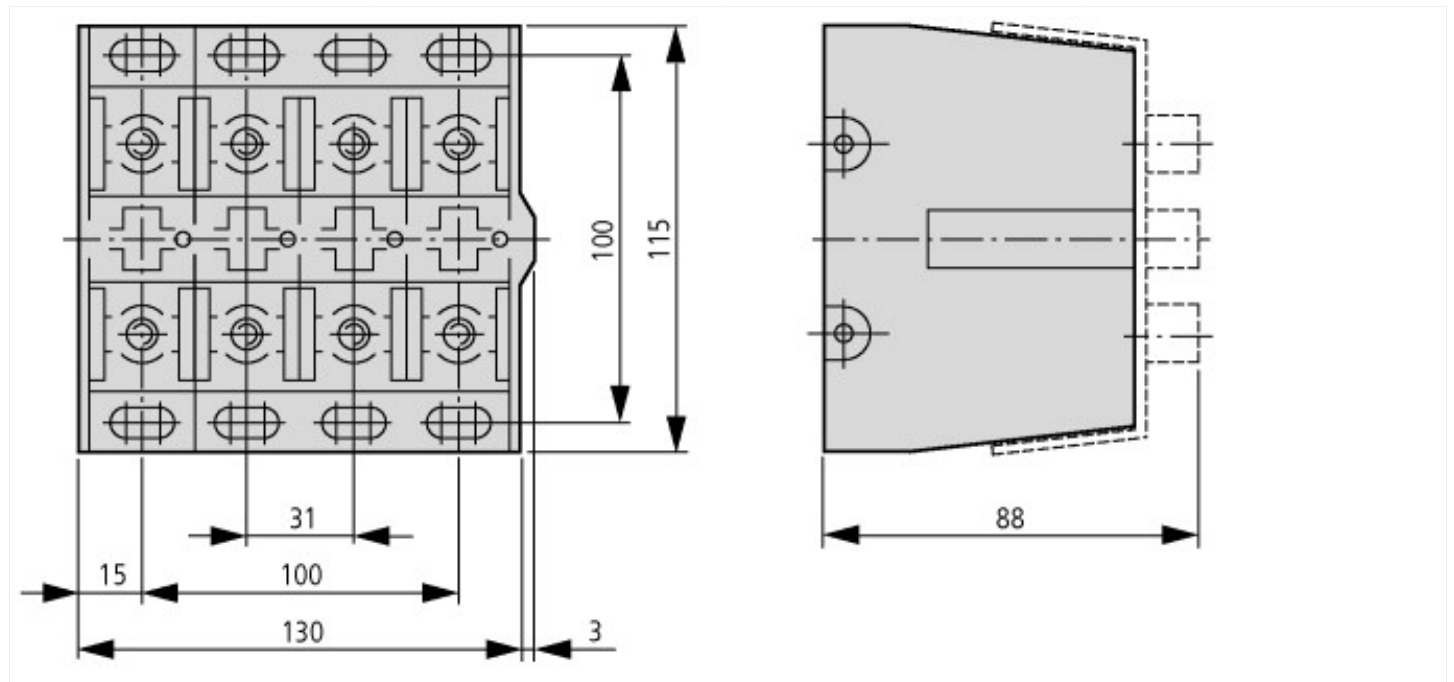

Additional product information (links)

AWA3400-0656 Connection terminals K95/...

AWA3400-0656 Connection terminals K95/...

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/06561089.pdf