




General info

Technical - Systems

Ean	8021696192604
Item	FLUO WIDE 1800 4000K WH
Installation	Systems
Guarantee	5 years
Gross weight	6.64 kg
Volume	0.025675 m ³

Technical info

Net weight	4.42 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Accessories not included	Mounting kit (suspension, recessed, surface), Dimmable driver, Luminous corner, Structure connector

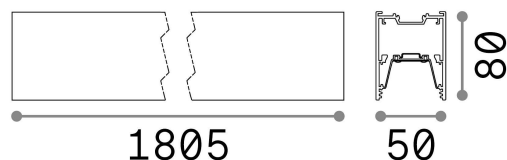

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	36 W
Emission	Direct
Max consumption	max 36,00 W
Features LED	LED SMD SAMSUNG
CCT LED	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Light beam	105°
Light beam flux	5300 lm
Useful light flux	4000 lm