



Panel Vienna

- Design low glare LED panel
- Comfortable lighting for study and work environment (UGR < 16)
- Standard equipped with CCT-switch and CRI90
- Compatible with Slim Panel surface mounting kit accessory



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
On-Off							
542003173600	LEDVienna-P Sq595-32W-930/940-U16	TL 4x18W	32	4000	125	3K/4K	1.7

Available on request with Wieland GST18 or WAGO WINSTA connector, or Euro/Schuko plug. Emergency lighting available on request. BLE versions in surface mounting frames might lead to limited BLE signal strength.

Accessories

Recessed Mounting Frame



542098009600
LEDPanelRc Sq600-Frame-WH

Surface Mounting Frame



542098017600
LEDPanelRc2 Sq600-Surface-Kit-WH



140060852
LEDFixture-Ceiling-Cable-Kit-0.5m



542003021700
LEDPanelRc-S-B2
Suspension-Kit



542003021800
LEDPanelRc-S-B2
Mounting-Springs



542098000800
LEDPanelRC-SI U19 EM-kit
1h




542098030700
Junction-Box-WH

Packaging information




Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
542003173600	LEDVienna-P Sq595-32W-930/940-U16	94051190	617x704x42	2.74	6941491729664	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	510x100x10	0.40	6956321895266	1
542003021700	LEDPanelRc-S-B2 Suspension-Kit	73121049	315x315x25	0.13	6941408821665	1
542003021800	LEDPanelRc-S-B2 Mounting-Springs	73209090	280x200x170	0.10	6941408821672	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098009600	LEDPanelRc Sq600-Frame-WH	94059900	688x88x694	1.79	6941497704061	1
542098017600	LEDPanelRc2 Sq600-Surface-Kit-WH	94059900	685x77x68	1.53	6941497720696	1
542098030700	Junction-Box-WH	85369010	43x103x36	0.06	6941408868684	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	90 °
Finishing	White RAL9003
RAL-Number	9003
Colour rendering index (CRI)	> 90
UGR	16
Ingress Protection (IP)	IP20
Impact strength (IK)	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications
Mechanical Properties	
Housing material	Aluminium
Optical material	Polycarbonate
Ambient Conditions	
Operating temperature	-10 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C

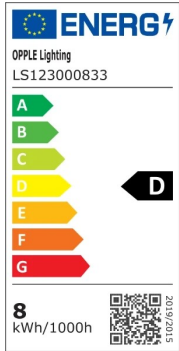

Dimensional Drawing (mm)

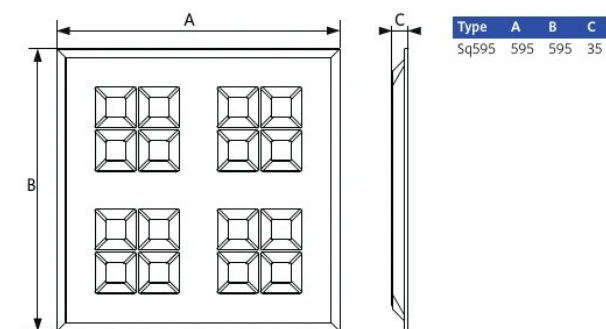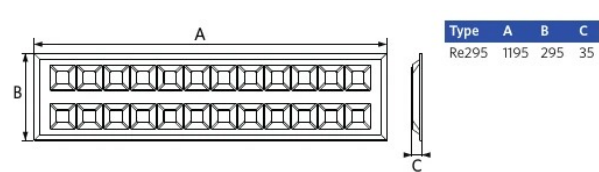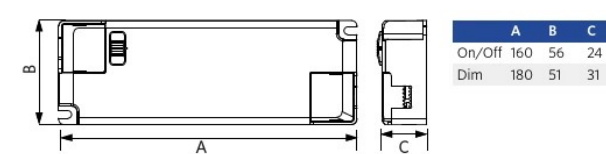

Photometric Data

