



LED Strip - IP67 - Tunable White

- Complete LED Strip portfolio
- Wide profile portfolio with different color options



Specifications

Item Code	Item Description	Efficacy (lm/W)	CCT (K)	[LEDs per meter]	[Minimum cutting length]	[Power per meter]	[Lumen per meter]	Net Weight (kg/pc)
Smart/IP67								
806001008600	LEDStrip-P 12W-1000-TW-IP67	120	2700 - 6500	140	100	12	1440	0.25

Accessories



806098002000
LEDStrip Profile-SF-15x15-AL




806098002200
LEDStrip Profile-SF-17x7-AL



806098002500
LEDStrip Profile-RC-15x15-AL



806098002600
LEDStrip Profile-Corner-18x18-AL



820004013700
LEDDriver 24V-200W-BLE2-TW



806098004600
LEDStrip Silicone-Kit-IP67



806098004700
LEDStrip Mounting-Kit-10-IP67



826001000300
LEDDriver 24V-80W-BLE2-TW

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
806001008600	LEDStrip-P 12W-1000-TW-IP67	94054239	240x220x14	0.34	6941491788661	1
806098002000	LEDStrip Profile-SF-15x15-AL	94059900	2050x33x33	0.20	6931783054406	1
806098002100	LEDStrip Profile-SF-15x15-BL	94059900	2050x33x33	0.20	6931783054413	1
806098002200	LEDStrip Profile-SF-17x7-AL	94059900	2050x33x33	0.20	6931783054420	1
806098002300	LEDStrip Profile-SF-17x7-BL	94059900	2050x33x33	0.20	6931783054437	1
806098002500	LEDStrip Profile-RC-15x15-AL	94059900	2050x33x33	0.20	6931783054451	1
806098002600	LEDStrip Profile-Corner-18x18-AL	94059900	2050x33x33	0.20	6931783054468	1
820004013700	LEDDriver 24V-200W-BLE2-TW	85369010	311x56x32	0.33	6941491787442	1
806098004600	LEDStrip Silicone-Kit-IP67	32141010	18x12x11	0.04	6931783054369	1
806098004700	LEDStrip Mounting-Kit-10-IP67	39174000	18x12x5	0.04	6931783054376	1
826001000300	LEDDriver 24V-80W-BLE2-TW	85369010	250x56x30	0.26	6941491787718	1

Technical Specifications

Lifetime (L70)	50,000
Dimmability	BLE2
Colour rendering index (CRI)	> 90
Ingress Protection (IP)	IP67
Risk group (EN 62471)	RG0
With control gear	False

Electrical Supply


Frequency	50 - 60
Nominal voltage	220 - 240

Mechanical Properties


Length	5000
--------	------

Ambient Conditions

Operating temperature	-10 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C

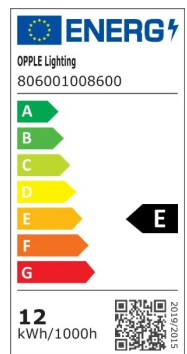

Dimensional Drawing (mm)

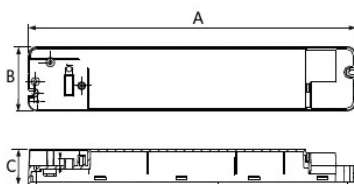

IP20 Driver	A	B	C
80W	230	45	25
200W	311	48	26



Strip IP67	A	B	C	D	E
12W	5000	300	9	4,5	100

