


EUROSAFE JE-H(St)H

300/500V PH120 - E30/E60

"Control and signalling cables, Al/Pet tape screened, fire resistant, fire retardant, halogen-free."

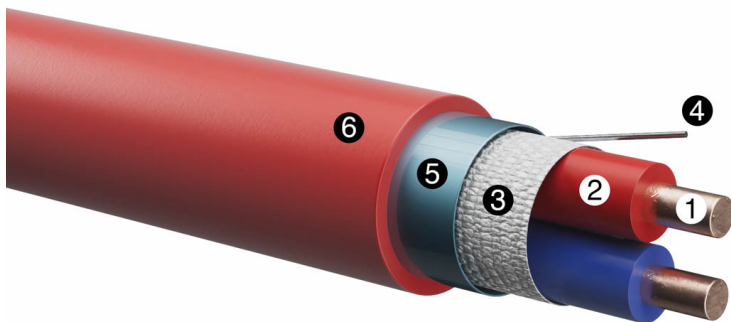

Legend

- | | |
|---------------------|-----------|
| 1. Conductor | 6. Sheath |
| 2. Insulation | |
| 3. Flame protection | |
| 4. Drain wire: | |
| 5. Screen: | |



View the product
on the website

DETAILS

Key features

For fixed indoor installation in dry or wet environments and temporarily outdoor. They can be installed on platforms, pipes, conduits and similar systems.

Application

Suitable for the transmission of signals and controls for electrical equipment when you need maximum security against fire, such as emergency lighting and alarm systems, automatic fire detection, fire extinguishing equipment, automatic opening doors, ventilation systems and conditioning, emergency telephone systems.

TECHNICAL SPECIFICATIONS

Features	Values	Rules
Conductors:	annealed red copper cl. 1	CEI EN 60228 (Table 9)
Insulation :	ceramifiable silicone rubber	
Cores colour:	(blue-red) - (yellow-grey) - (green-brown) - (white-black)	DIN VDE 815
Flame protection :	glass-fibre tape thickness 0,12 mm	
Drain wire:	annealed tinned copper	
Screen:	Al/Pet tape thickness 9/23 µm covering > 110%	
Sheath:	LSZH compound M1 quality	CEI EN 50363
Sheath colour :	red RAL 3000	
Fire retardant:		CEI EN 60332-3-24
Flame retardant:		CEI EN 60332-1-2
Halogen free:	(< 0,5 mg/g - 0,5%)	CEI EN 50267-2-1/2 - IEC 60754-1/2
Low smoke emission:	(Trasmittance > 60%)	CEI EN 61034-2
Fire resistant:	duration 120 min. at temperature of 830 °C. (- 0 ÷ + 40 °C)	CEI EN 50200
Fire resistant:	(E30/E60)	DIN VDE 4102-12
Fire resistant:	duration 180 min. at temperature of 750 °C FE180	IEC 60331-21 - VDE 472-814
DC resistance:	according to	CEI EN 60228 (Table 9)
Rated voltage Uo/U:	300/500 V	
Max voltage :	550 V	
Testing voltage :	2 kV	
Max working temperature :	90 °C	
Max conductor temperature:	180 °C	
Short circuit temperature:	350 °C	
Min. installation temperature:	0 °C	
Bending radius:	Ø x 10	
Printing:	EUROSAFE JE-H(St)H Formazione E30/E60 DIN 4102-12 CEI EN 50200 PH(120) CE Year/Lot 00000m	

VARIANTS

TYPE N° x mm ²	Ø MEDIUM EXTERIOR mm	MEDIUM WEIGHT kg/km	CODE
1x2x0,80	5.6	40.3	B7301C080FR
2x2x0,80	8.6	76.6	B7302C080FR
3x2x0,80	9.4	96.8	B7303C080FR
4x2x0,80	10.6	126.4	B7304C080FR

TYPE N° x mm ²	Ø MEDIUM EXTERIOR mm	MEDIUM WEIGHT kg/km	CODE
1x2x1mmq	6.4	67	B7301C100FR
2x2x1mmq	10.1	138	B7302C100FR
1x2x1,5 mmq	8.2	100	B7301C150FR
2x2x1,5mmq	12.4	205	B7302C150FR
1x2x2,5mmq	9.6	132	B7301C250FR

L'azienda si riserva la facoltà di modificare/adeguare senza preavviso le informazioni tecniche e dimensionali dei prodotti inseriti nel sito.