



Shared components: IoT connected multif.actuator 4out relay

03985

Wiring devices / View Wireless wiring devices / Shared components / DIN devices

IoT connected multif.actuator 4out relay

VIEW Wireless electronic control actuator with 4 relay outputs 16 A 240 V~, programmable NO/NC with function to control lights, roller shutters with slat orientation, fan coil, climate control, accesses, sprinkler system, push buttons for local control, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm



Product Status

3 - Active

Minimum order quantity

1 NR

You may also be interested in



14597 - IoT connected gateway 2M white



19597 - IoT connected gateway 2M grey



09597.CM - IoT connected gateway 2M carbon matt



09597 - IoT connected gateway 2M white



20597 - IoT connected gateway 2M grey



30807.B - IoT connected Gateway 2M white



14591.0 - IoT connected device mechanism



19591.0 - IoT connected device mechanism



20591.0 - IoT connected device mechanism




30801 - IoT connected mechanism


Sheets, Manuals, Documentation

- [Foglio istruzioni Full \(491 kb\)](#)
- [Full instructions sheet \(485 kb\)](#)
- [Ficha de instrucciones Full \(488 kb\)](#)
- [Anweisungsblatt Full \(488 kb\)](#)
- [Light multilanguage instructions sheet \(1082 kb\)](#)
- [تاداش رالاء قورو Full \(619 kb\)](#)
- [Notice technique Full \(488 kb\)](#)
- [Φυλλάδιο οδηγιών Full \(597 kb\)](#)


Drawings

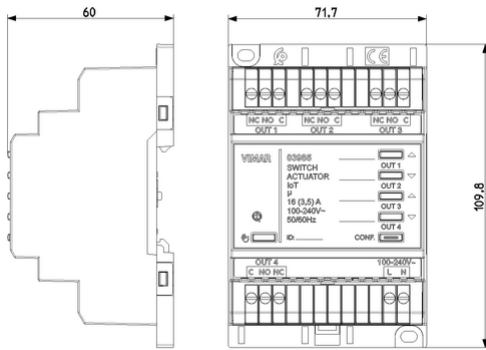

Space view

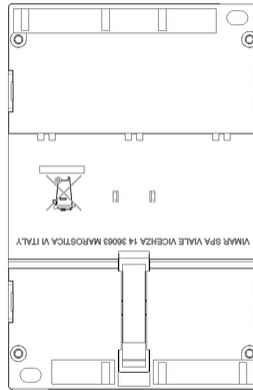

Backside view

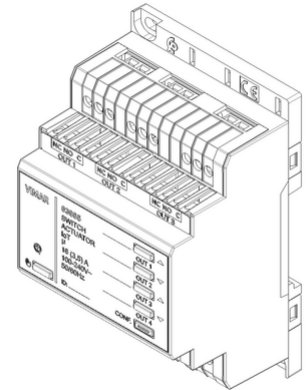

3D View

Certifications

- 00. CE Marking - EU ([download](#))
- 01. IMQ - Italy
- 37. Marking - Morocco
- 40. Bluetooth technology
- 46. UK PSTI compliance ([download](#))

Technical data

Class group: Installation bus systems

Class: Switch actuator for bus system

Bus system KNX: No

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: Yes

Bus system LON: No

Bus system Powernet: No

Other bus systems: None

Radio frequency bidirectional: Yes

Mounting method: DRA (DIN-rail adaptor)

Width in number of modular spacings: 4

Local operation/hand operation: Yes

With LED indication: Yes

Packaging



8007352767416

Qtà 1 NR
Dim 11.7x10.8x7.1
[cm]
Weight 241.7 [g]



8007352767423

Qtà 60 NR
Dim 59x38.5x30 [cm]
Weight 15,225 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).