



Shared components: Actuator 0/1-10Vdc + IoT connected relay

03986

Wiring devices / View Wireless wiring devices / Shared components / DIN devices

Actuator 0/1-10Vdc + IoT connected relay

VIEW Wireless electronic control actuator with 1 proportional analogue 0/1-10 V output with re-scalable voltage, 1 10 AX relay output 100-240 V~ 50/60 Hz, programmable NO/NC with function to control lights, fan coil, climate control, accesses, sprinkler system, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 2 modules size 17.5 mm



Product Status

3 - Active

Minimum order quantity

1 NR

You may also be interested in



14597 - IoT connected gateway 2M white



19597 - IoT connected gateway 2M grey



09597.CM - IoT connected gateway 2M carbon matt



09597 - IoT connected gateway 2M white



20597 - IoT connected gateway 2M grey



30807.B - IoT connected Gateway 2M white



14591.0 - IoT connected device mechanism



19591.0 - IoT connected device mechanism



20591.0 - IoT connected device mechanism




30801 - IoT connected mechanism

Sheets, Manuals, Documentation

- [Light multilanguage instructions sheet \(958 kb\)](#)
- [Foglio istruzioni Full \(595 kb\)](#)
- [Ficha de instrucciones Full \(595 kb\)](#)
- [Full instructions sheet \(591 kb\)](#)
- [Anweisungsblatt Full \(594 kb\)](#)
- [Notice technique Full \(594 kb\)](#)
- [Φυλλάδιο οδηγιών Full \(718 kb\)](#)
- [تاداشرال ةقرو Full \(725 kb\)](#)


Drawings

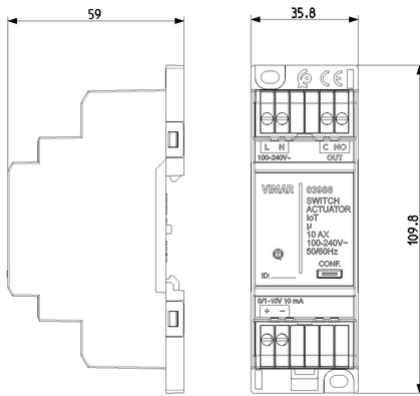

Space view



Backside view

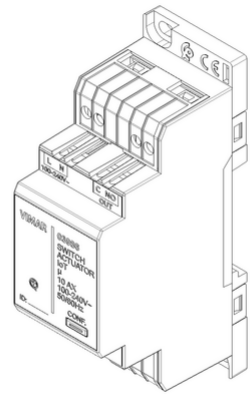

3D View

Certifications

- 00. CE Marking - EU ([download](#))
- 01. IMQ - Italy
- 37. Marking - Morocco
- 40. Bluetooth technology
- 46. UK PSTI compliance ([download](#))

Technical data

Class group: Installation bus systems

Class: Dimming actuator for bus system

Bus system KNX: No

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: Yes

Bus system LON: No

Bus system Powernet: No

Other bus systems: Other

Radio frequency bidirectional: Yes

Model: Dimming actuator

Mounting method: Other

Width in number of modular spacings: 2

Local operation/hand operation: Yes

With LED indication: Yes

Number of outputs: 2

Type of load: Universal

Max. control current: 10.000 mA

Degree of protection (IP): IP40

Packaging



8007352767430

Qtà 1 NR
Dim 14.2x6.2x5.6
[cm]
Weight 134 [g]



8007352767447

Qtà 40 NR
Dim 37x28.5x25 [cm]
Weight 5,700 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).