



## Linear Clio EcoMax

- Linear Clio EcoMax has a compact design, perfect for upgrading old tube fixtures in existing metal housings
- Luminaire with integrated CCT-switch for color selection (3000K-4000K)
- Driver with integrated Power Switch
- Delivers consistent light output for up to 50,000 hours at L80 level
- Easy to install with both magnetic and screw mounting options included
- DC compatibility makes it suitable for use with central emergency lighting systems




## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	CCT (K)	Net Weight (kg/pc)
<b>On-Off/CCT-Switch</b>						
805012006900	LEDClio-Lin-E L12-16/25W-830/840	TL 1x58W	16 - 25	2720 - 4250	3K/4K	0.22

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
805012006900	LEDClio-Lin-E L12-16/25W-830/840	94054239	1200x40x36	0.32	6937209622860	1

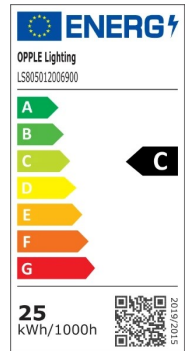


Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	25,000
Dimmability	On-Off
Beam angle	145 °
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP20
Protection class	II
With control gear	True

Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

#### Mechanical Properties

Ambient Conditions	
Operating temperature	-25 - 45 °C
Application temperature	25 °C
Storage environment	-20 - 60 °C

## Dimensional Drawing (mm)



Type	A	B	C
L06	585	35	34
L12	1185	35	34
L15	1485	35	34

## Photometric Data

