


- Compact sensor range with Relay (230V) , DALI-2 Broadcast, DALI-2 input and Smart BLE2 versions
- Adjustable sensitivity or daylight treshhold via rotary switches or remote controller
- Compatible with the Opple Smart Lighting system (DALI input/BLE2 versions)
- Surface mounting accessory available




Item Code	Item Description	Net Weight (kg/pc)	Sensor Range
Relay			
822001000800	SmartSensor-Relay/Slave-PIR-L-RND	0.09	13

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
82200100800	SmartSensor-Relay/Slave-PIR-L-RND	85365005	85x85x95	0.03	6937209626929	1
822001002000	SmartSensor-Remote-Controller	85269200	100x50x22	0.02	6937209627049	1
822001002100	SmartSensor-Surface-Module-D68	85269200	72x72x92	0.26	6937209627056	1
822001002200	SmartSensor-Surface-Module-D84	85269200	87x87x92	0.32	6937209627063	1


Electrical Supply	
Max. switching power	0.11 W
Nominal voltage	220 - 240 V
Frequency	50 - 60 Hz
Mechanical Properties	
Material	PC
Ambient Conditions	
Operating temperature	-30 - 50




Dimensional Drawing (mm)

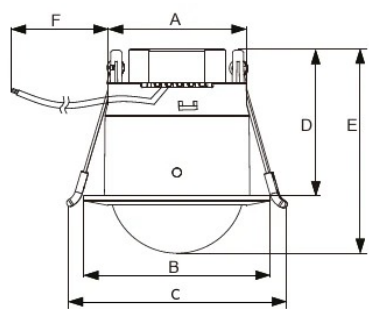

Type	A	B	C	D	E	F
ASY	68	84	106	70	92	750

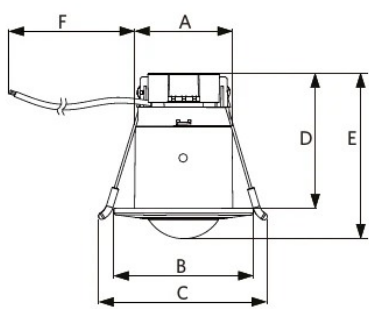


Type	A	B	C	D	E	F
RND	48	68	88	68	83	750

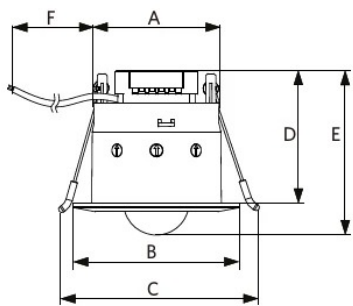


Type	A	B	C	D	E	F
RND DALI Master	68	84	106	70	86	750

Installation Opening Drawing (mm)

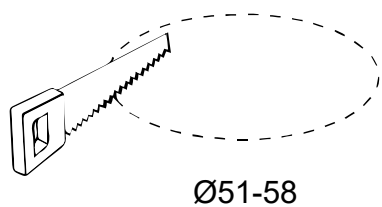

Ø51-58

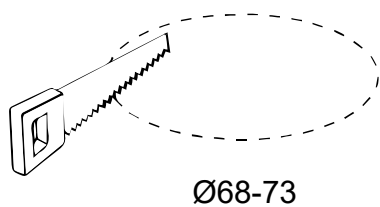

Ø68-73