
Shared components: By-me 12 OUT 6M DIN actuator

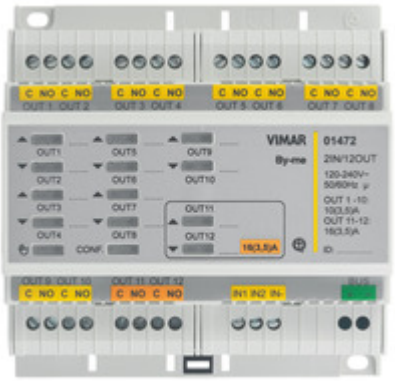

01472

Smart systems&products / By-me Plus / Shared components / DIN devices

By-me 12 OUT 6M DIN actuator

By-me Plus electronic control module with 2 inputs and 12 programmable outputs for residential or hotel applications, programmable digital inputs for potential-free contacts with control function for lights, roller shutters and to recall a scenario, 10 NO 10(3.5) A or 3.5 A motor 50/60 Hz 120-240 VAC relay outputs, 2 NO 16 (3.5) A or 3.5A motor 120-240 VAC 50/60 Hz relay outputs programmable with control function for lights, roller shutters with slat orientation, climate control and circulation pump, push buttons for local control, By-me home automation system, installation on DIN rails (60715 TH35), occupies 6 modules size 17.5 mm.

Product Status

3 - Active


Minimum order quantity

1 NR


Sheets, Manuals, Documentation


- Light multilanguage instructions sheet (751 kb)
- Foglio istruzioni Full (207 kb)
- Notice technique Full (206 kb)
- Ficha de instrucciones Full (207 kb)
- Full instructions sheet (205 kb)
- Φυλλάδιο οδηγιών Full (332 kb)
- Anweisungsblatt Full (207 kb)
- ورقة الإرشادات Full (340 kb)

Drawings




Space view



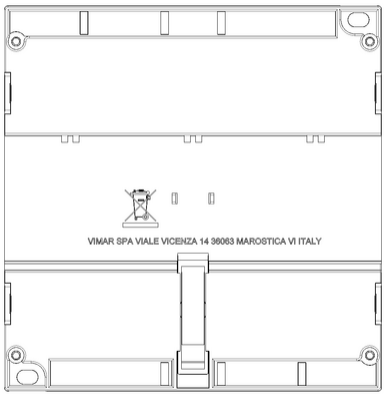

Backside view

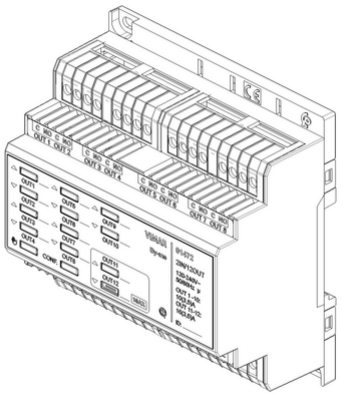

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy**
- **37. Marking - Morocco**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Installation bus systems

Class: Switch actuator for bus system

Bus system KNX: No

Bus system KNX-RF (Radio Frequency): No

Bus system KNX Secure: No

Bus system KNX Secure-RF (Radio Frequency): No

Bus system radio frequency: No

Bus system LON: No

Bus system Powernet: No

Other bus systems: Other

Radio frequency bidirectional: No

Number of linkable devices: 4

Mounting method: Other

Width in number of modular spacings: 4

Local operation/hand operation: Yes

With LED indication: Yes

Number of digital inputs: 4

Suitable for C-load: No

Max. number of switching contacts: 4

Rated current: 16 A

Rated operating voltage: 120,00 - 230,00 V

Different phases connectable: No

With bus connection: Yes

Bus module detachable: Yes

Modular expandability: No

Degree of protection (IP): IP20

Packaging

8007352817647

Qtà	1 NR
Dim	11.9x11.5x6.9 [cm]
Weight	337 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.