



Classia

- One-way switch
- Two-way switch
- Four-way switch
- Pushbutton
- Pull-cord pushbutton


RW4001 - RG4001 - RW4001M2 - RG4001M2
 RW4003 - RG4003 - RW4003M2 - RG4003M2
 RW4004 - RG4004 - RW4004M2 - RG4004M2
 RW4005 - RG4005 - RW4005M2 - RG4005M2
 RW4033 - RG4033




..4001
 ..4003
 ..4005




..4001M2
 ..4003M2
 ..4005M2



..4004



..4004M2

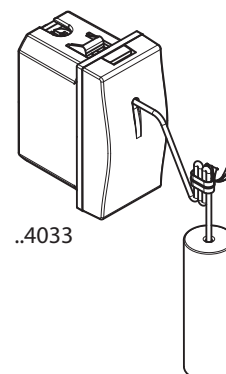

..4033

Use

Rocker control device for lighting and other loads.


Range

Designation	Item 1 Module	Item 2 Modules
One-way switches 1P 10AX 250 Va.c.	☐ RW4001 ☒ RG4001	☐ RW4001M2 ☒ RG4001M2
Two-way switches 1P 10AX 250 Va.c.	☐ RW4003 ☒ RG4003	☐ RW4003M2 ☒ RG4003M2
Four-way switches Intermediate 10AX 250 Va.c.	☐ RW4004 ☒ RG4004	☐ RW4004M2 ☒ RG4004M2
Pushbuttons 1P (NO) 10A 250 Va.c.	☐ RW4005 ☒ RG4005	☐ RW4005M2 ☒ RG4005M2
Pushbuttons with cord-pull 1P (NO) 10A 250 Va.c.	☐ RW4033 ☒ RG4033	

Color code:

☐ White colour ☒ Black colour

Overall dimensions (mm)

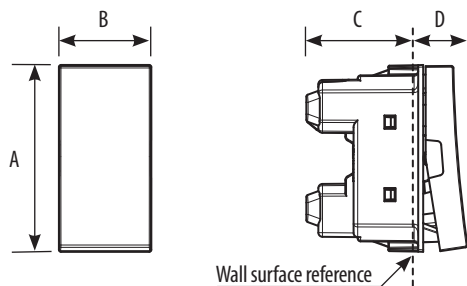

..4001 ..4003 ..4005	A	B	C	D
1 Module	45.1	22.3	27	11.9
2 Modules	45.1	44.7	27	11.9
..4004	A	B	C	D
1 Module	45.1	22.3	28.1	11.9
2 Modules	45.1	44.7	28.1	11.9
..4033	A	B	C	D
1 Module	45.1	22.3	23.9	12.8

Connection

Terminal type: screw clamp

Terminal capacity: 2 x 4 mm² max

Stripping length: 9 mm

Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)

Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:

Case: PC (Polycarbonate)

Key cover: ABS - ABS/PC

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.

Current: 10AX for ..4001../..4003../..4004..

Current: 10A for ..4005../..4033..

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.