



**Classia** - One-way switch lightable with led lamp  
 - Two-way switch lightable with led lamp  
 - Four-way switch lightable with led lamp  
 - Pushbutton lightable with led lamp


RW4001LA - RG4001LA - RW4001LR - RG4001LR - RW4001L - RG4001L - RW4001M2L - RG4001M2L  
 RW4003L - RG4003L - RW4003M2L - RG4003M2L  
 RW4004L - RG4004L - RW4004M2L - RG4004M2L  
 RW4005L - RG4005L - RW4005M2L - RG4005M2L - RW4043 - RG4043 - RW4042V12 - RG4042V12  
 RW4042V230 - RG4042V230




..4001L  
 ..4003L  
 ..4005L




..4001M2L  
 ..4003M2L  
 ..4005M2L



..4004L



..4004M2L



..4001..  
 ..4042....  
 ..4043

**Use**

Rocker control device for lighting and other loads.


**Range**

Designation	Item 1 Module	Item 2 Modules	Led Lamp
One-way switches 1P 10AX 250 Va.c.	<input type="checkbox"/> RW4001L	<input type="checkbox"/> RW4001M2L	230V
	<input checked="" type="checkbox"/> RG4001L	<input checked="" type="checkbox"/> RG4001M2L	
	<input type="checkbox"/> RW4001LR		230V
	<input checked="" type="checkbox"/> RG4001LR		
	<input type="checkbox"/> RW4001LA		230V
Two-way switches 1P 10AX 250 Va.c.	<input type="checkbox"/> RW4003L	<input type="checkbox"/> RW4003M2L	230V
	<input checked="" type="checkbox"/> RG4003L	<input checked="" type="checkbox"/> RG4003M2L	
Four-way switches Intermediate 10AX 250 Va.c.	<input type="checkbox"/> RW4004L	<input type="checkbox"/> RW4004M2L	230V
	<input checked="" type="checkbox"/> RG4004L	<input checked="" type="checkbox"/> RG4004M2L	
Pushbuttons 1P (NO) 10A 250 Va.c.	<input type="checkbox"/> RW4005L	<input type="checkbox"/> RW4005M2L	230V
	<input checked="" type="checkbox"/> RG4005L	<input checked="" type="checkbox"/> RG4005M2L	
	<input type="checkbox"/> RW4043		230V
	<input checked="" type="checkbox"/> RG4043		
	<input type="checkbox"/> RW4042V230		230V
	<input checked="" type="checkbox"/> RG4042V230		
	<input type="checkbox"/> RW4042V12		12V
<input checked="" type="checkbox"/> RG4042V12			

Color code:

White colour     Black colour

**Overall dimensions (mm)**

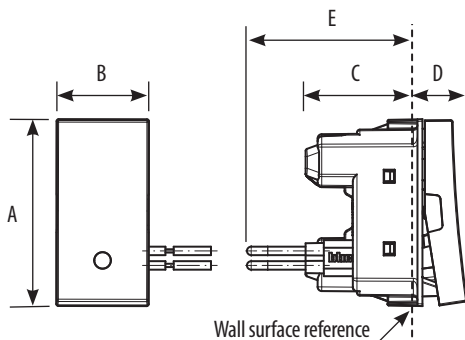

..4001.. / ..4003.. / ..4042.. / ..4043	A	B	C	D	E
1 Module	45.1	22.3	27	11.9	29.5
2 Modules	45.1	44.7	27	11.9	29.5
..4004..	A	B	C	D	E
1 Module	45.1	22.3	28.1	11.9	30.6
2 Modules	45.1	44.7	28.1	11.9	30.6

**Connection**

Terminal type: screw clamp  
 Terminal capacity: 2 x 4 mm<sup>2</sup> max  
 Stripping length: 9 mm  
 Compatible with flexible or rigid cables

**Technical characteristics**

- **Protection index**  
 (considering a complete installation, including cover plate)  
 Penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**  
 Impact test: IK 04
- **Material characteristics**  
 Material:  
 Case: PC (Polycarbonate)  
 Key cover: ABS - ABS/PC  
 UV resistant.
- Self-extinguishing:  
 850° C / 30 s for insulating parts holding live parts in place  
 650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**  
 Voltage: 250 V a.c.  
 Current: 10AX for ..4001.. / ..4003.. / ..4004..  
 Current: 10A for ..4005.. / ..4042.. / ..4043
- **Climatic characteristics**  
 Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

**Cleaning**

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Compliance with standards IEC/EN 60669-1.  
 Refer to e.catalogue.