



Classia - One-way switch 16AX 1P lightable with led lamp
 - One-way switch 16AX 2P lightable with led lamp

RW4001LS - RG4001LS - RW4001LP - RG4001LP
 RW4002L - RG4002L



..4001..



..4002..

Use

Rocker control device for lighting and other loads.
 Lightable with supplied led.


Range

Designation	Item 1 Module	Led Lamp
One-way switches 1P 16AX 250 Va.c.	<input type="checkbox"/> RW4001LS	230V
	<input checked="" type="checkbox"/> RG4001LS	
	<input type="checkbox"/> RW4001LP	230V
	<input checked="" type="checkbox"/> RG4001LP	
One-way switches 2P 16AX 250 Va.c.	<input type="checkbox"/> RW4002L	230V
	<input checked="" type="checkbox"/> RG4002L	

Color code:

White colour Black colour

Overall dimensions (mm)

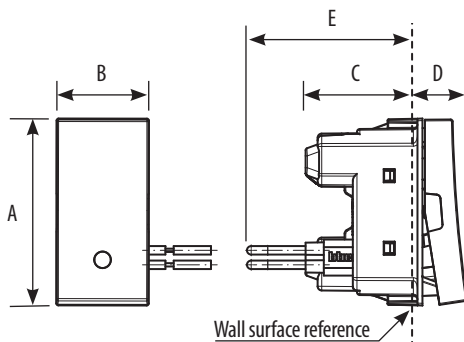

	A	B	C	D	E
..4001..	45.1	22.3	27	11.9	29.5
..4002..	45.1	22.3	28.1	11.9	30.6

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 4 mm² max
 Stripping length: 9 mm
 Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
 Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:
 Case: PC (Polycarbonate)
 Key cover: ABS - ABS/PC
 UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place
 650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.
 Current: 16AX

- Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
 Refer to e.catalogue.