



Neve Up: 2P+E 16A USA+EU SICURY outlet carbon mat

09248.CM

Neve Up / Devices / Other standards socket outlets

2P+E 16A USA+EU SICURY outlet carbon mat


2P+T 16 A 250 V~ SICURY socket outlet, Euro-American polarised standard, carbon matt - 2 modules

Product Status

3 - Active

Minimum order quantity

20 NR

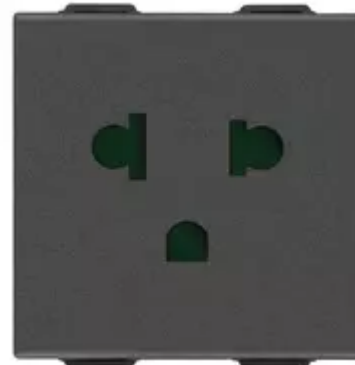


You may also be interested in




[09249.CM - 2 2P+E 16A
USA+EU SICURY outlets
carbon](#)


Drawings

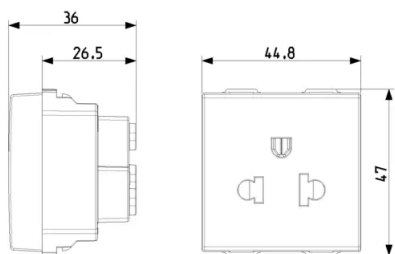

Space view



Backside view



3D View



Technical data

- **Class group:** Domestic switching devices
- **Class:** Socket outlet
- **Model:** Other
- **With built-in USB power supply:** No
- **Number of modules (module system):** 2
- **With hinged lid:** No
- **Label space/information surface:** Yes
- **Colour:** Anthracite
- **RAL-number (similar):** 7016
- **Metallic colour:** No
- **Transparent:** No
- **Lockable:** No
- **Eject-mechanism:** No
- **Insulated mounting:** No
- **Mounting method:** Flush mounted (plaster)
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Lacquered
- **Surface finishing:** Matt
- **Anti-bacterial treatment:** No
- **With on/off switch:** No
- **With loop through function:** No
- **Rotated central insert:** No
- **Nominal current:** 16 A
- **Nominal voltage:** 250 v
- **Frequency:** 50,00 - 60,00 HZ
- **Width of device:** 44,80 mm
- **Height of device:** 47,00 mm
- **Depth of device:** 36,00 mm

Certifications

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 19. NOM - Mexico
- 29. QCERT - Colombia ([download](#))
- 37. Marking - Morocco
- 99. WEEE Directive ([download](#))

Packaging



8 007352 666566
Code 8007352666566
Quantity 1 NR
Dim. 5.1x4.3x5.3 [cm]
Weight 43.4 [g]



8 007352 666573
Code 8007352666573
Quantity 20 NR
Dim. 26.9x11.6x9 [cm]
Weight 949.2 [g]



8 007352 666580
Code 8007352666580
Quantity 240 NR
Dim. 38x28.5x35.5 [cm]
Weight 11,900 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).